CAT 777F

Machine Visibility

Distances where
blind spots intersect
machine reference lines
A= 2.9m
B= 3.6m
C= 7.6m

Area of blind spot
at 1metre high

y

B

A

C

X

Area of vision
through standard mirrors

W

□ =0.5m

SPILLARD
safety systems

©2007 Spillard Safety Systems Limited. All Rights Reserved

CAT 777F

Camera Visibility

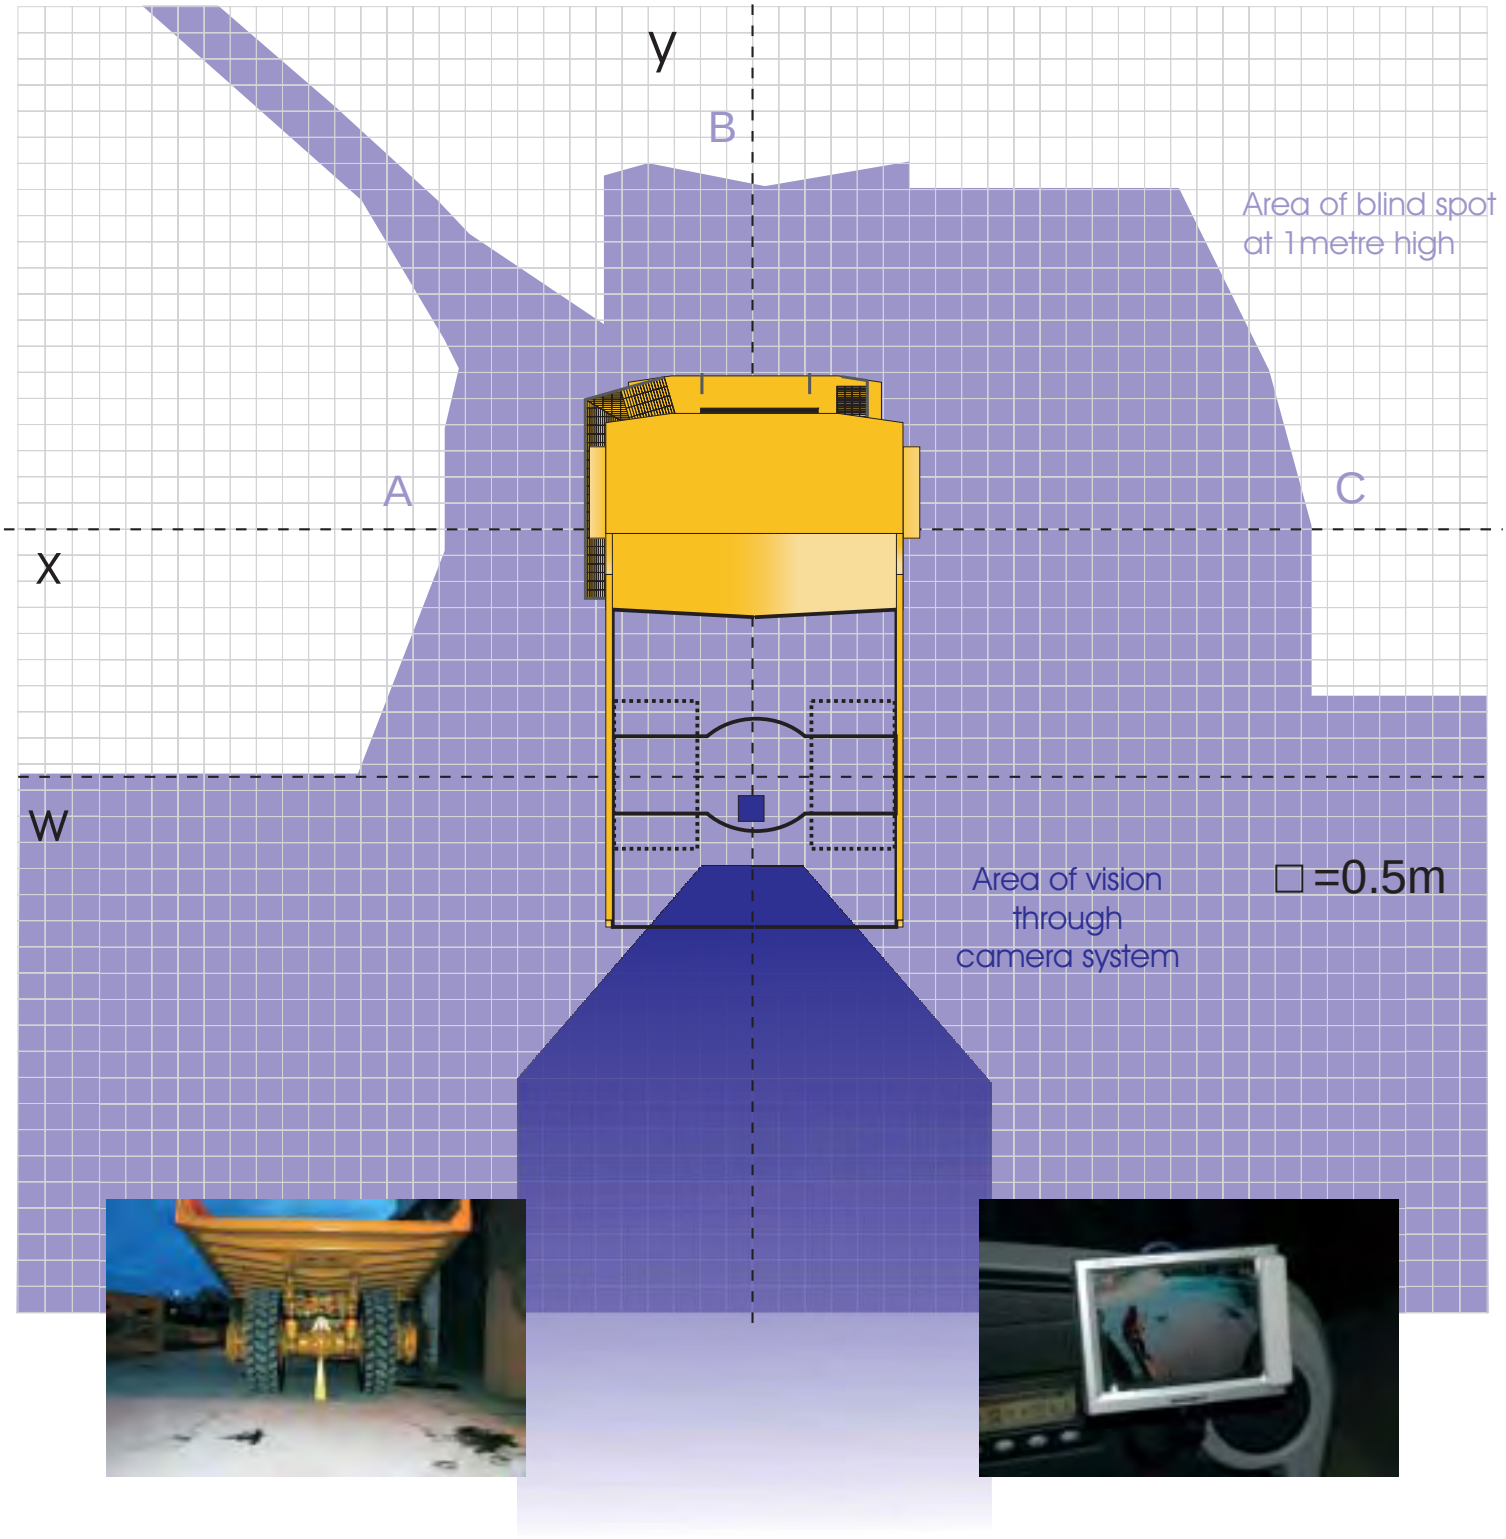

SPILLARD
safety systems

©2007 Spillard Safety Systems Limited. All Rights Reserved

CAT 777F

Enhanced Visibility

nc100, hd052

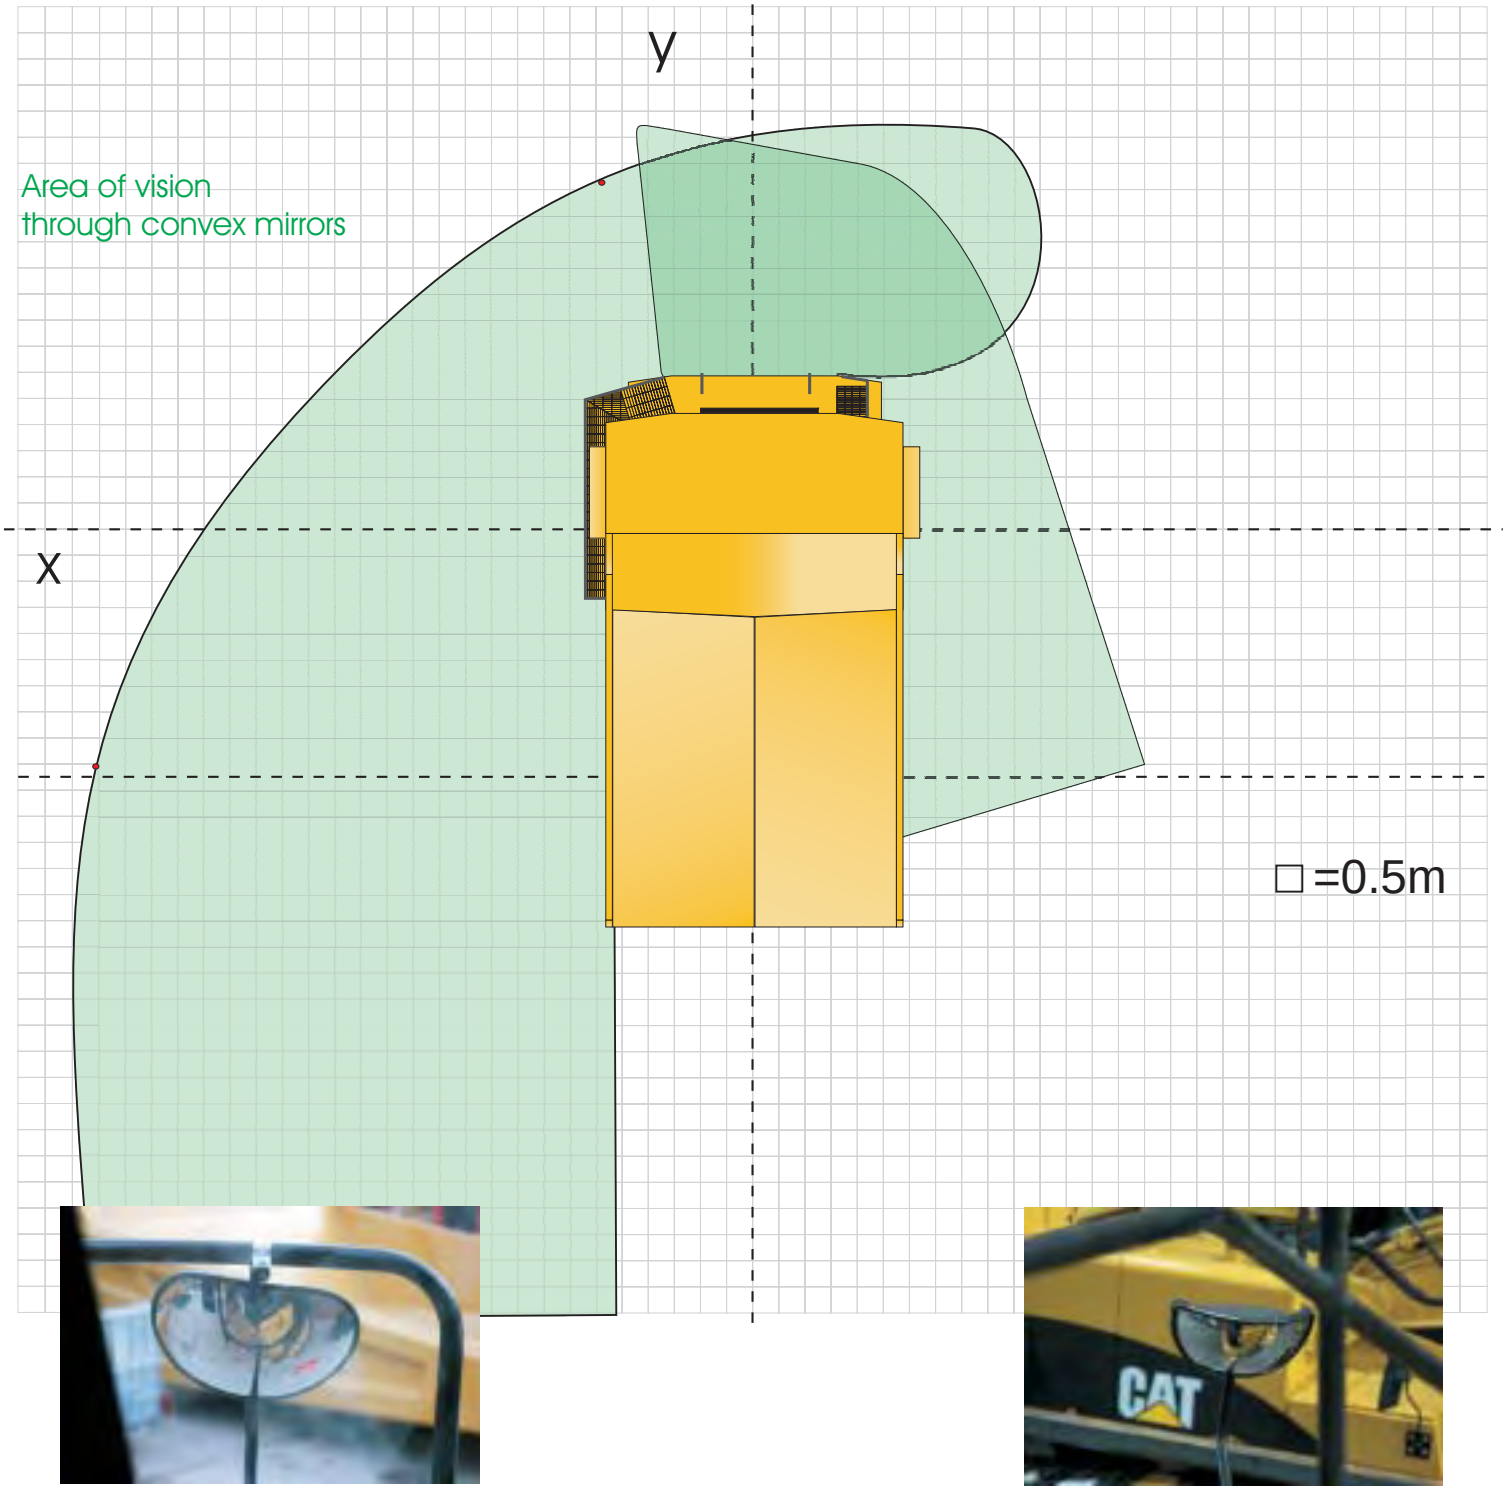

SPILLARD
safety systems

©2007 Spillard Safety Systems Limited. All Rights Reserved

CAT 777F

Comparison

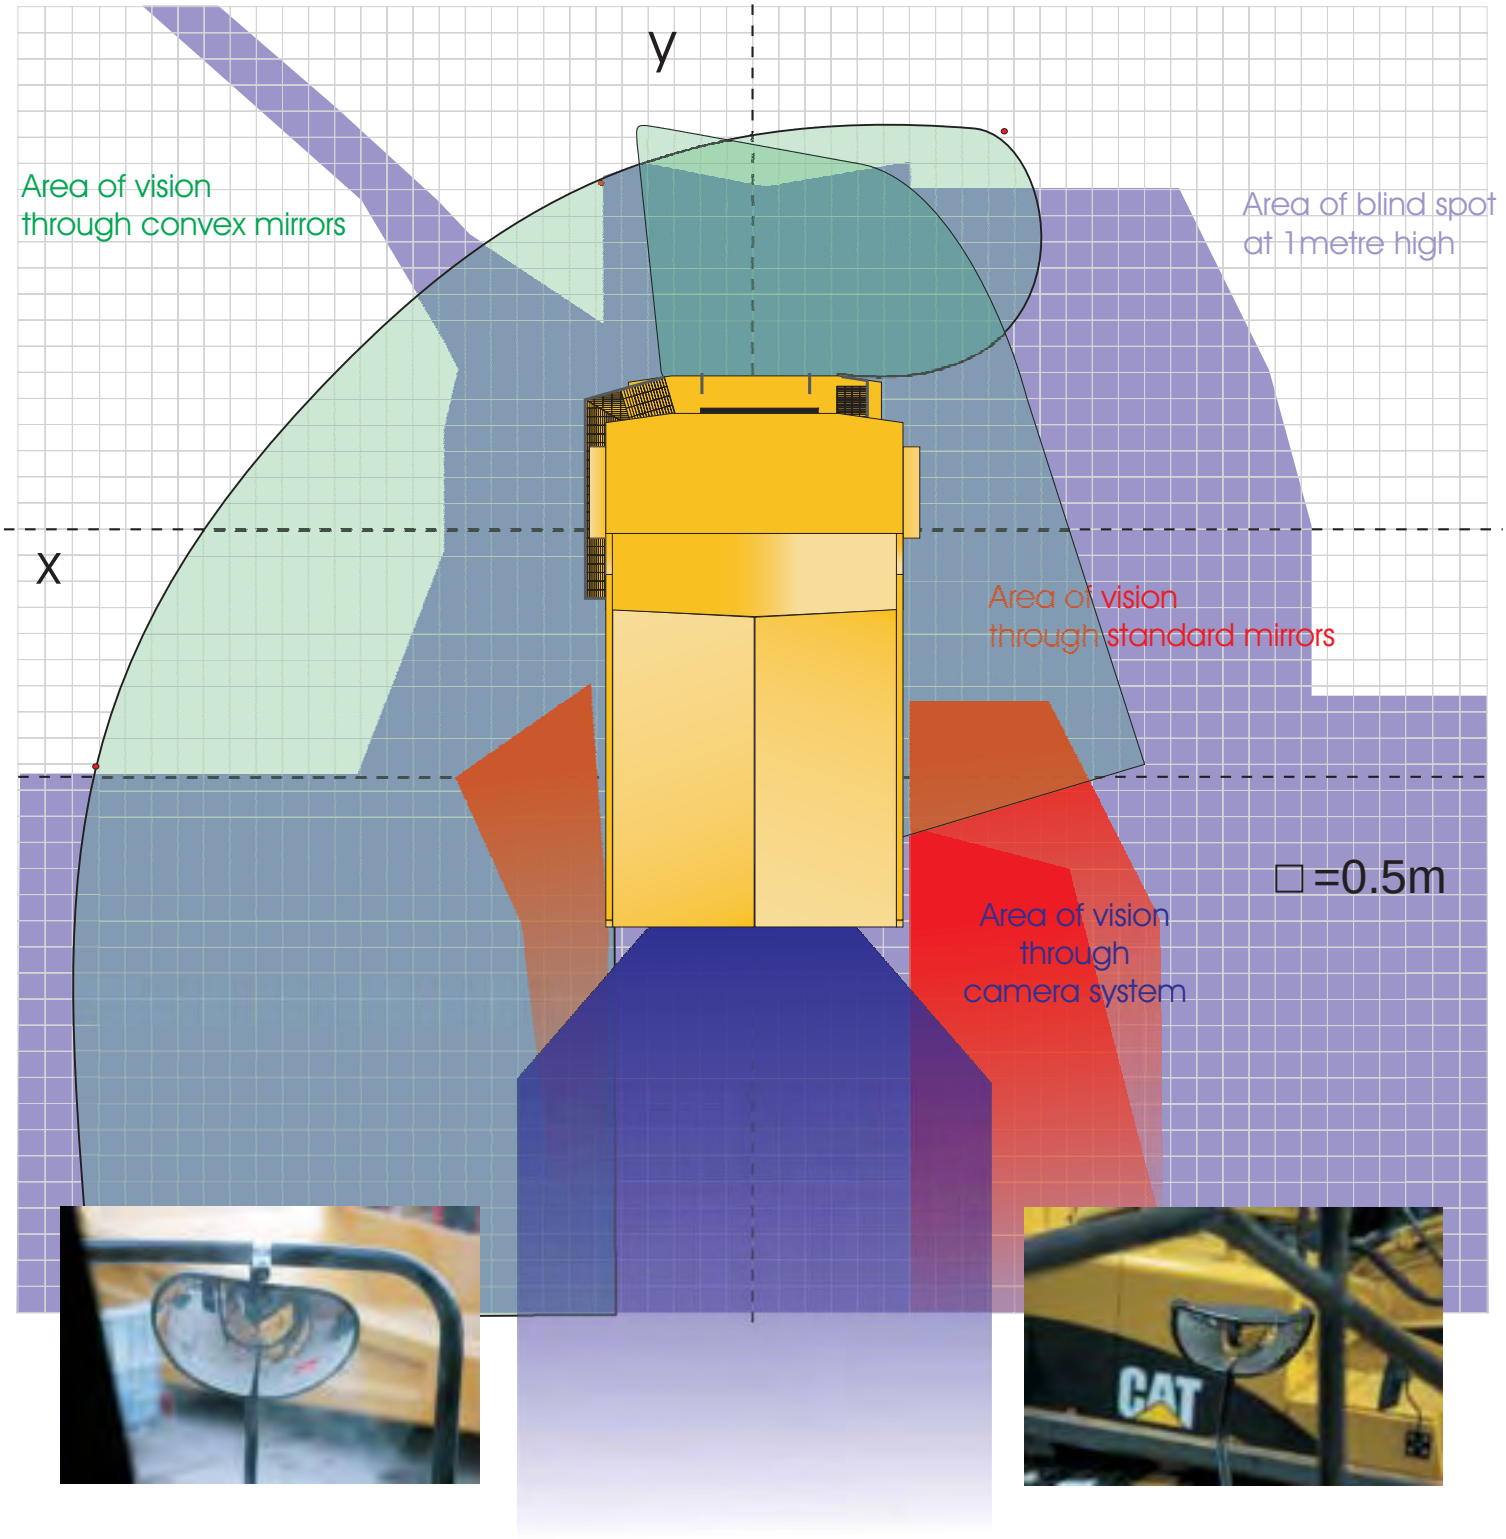

SPILLARD
safety systems

©2007 Spillard Safety Systems Limited. All Rights Reserved