





CAT 950H
Waste Handler

Machine Visibility



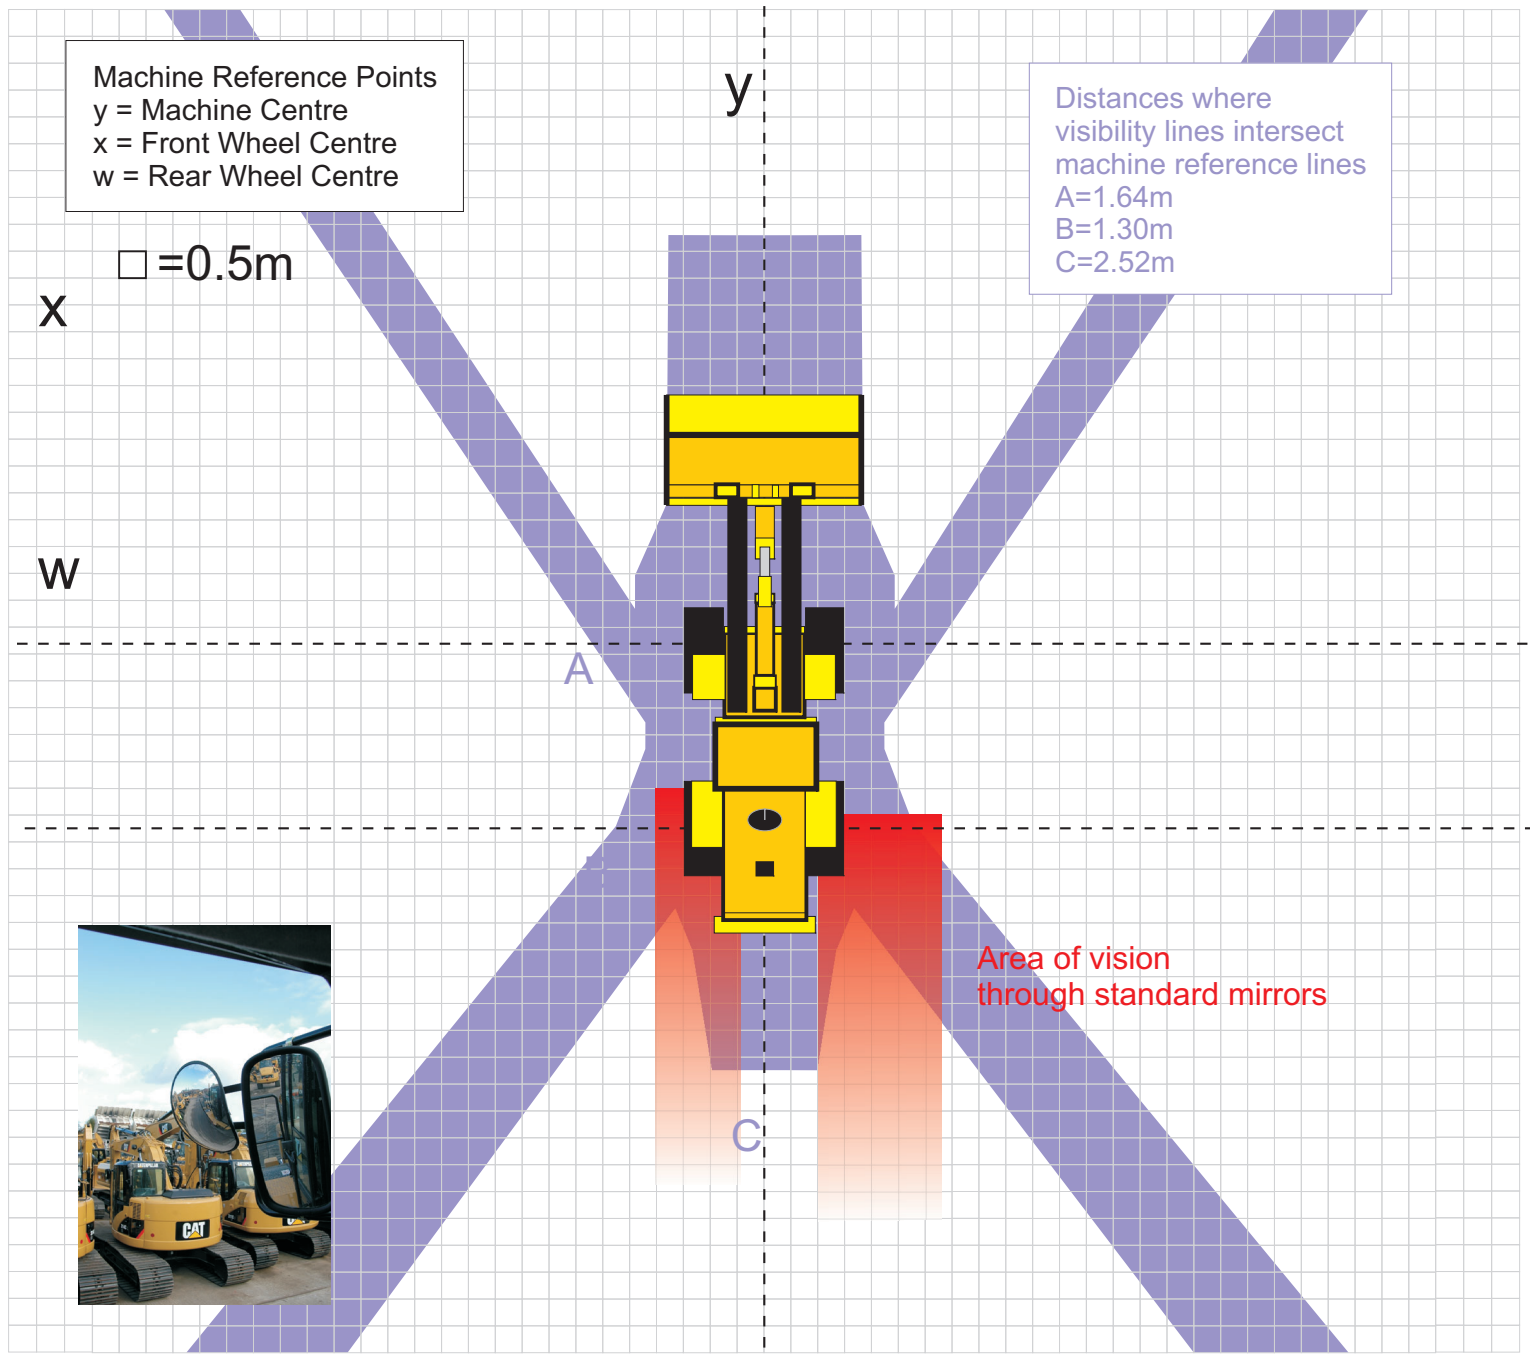

CAT 950H
Waste Handler

Enhanced Visibility

Machine Reference Points
y = Machine Centre
x = Front Wheel Centre
w = Rear Wheel Centre


□ = 0.5m

Distances where
visibility lines intersect
machine reference lines
A=1.64m
B=1.30m
C=2.52m

X

W


Visibility through convex
mirrors @ 1m high



Comparison





CAT 950H
Waste Handler

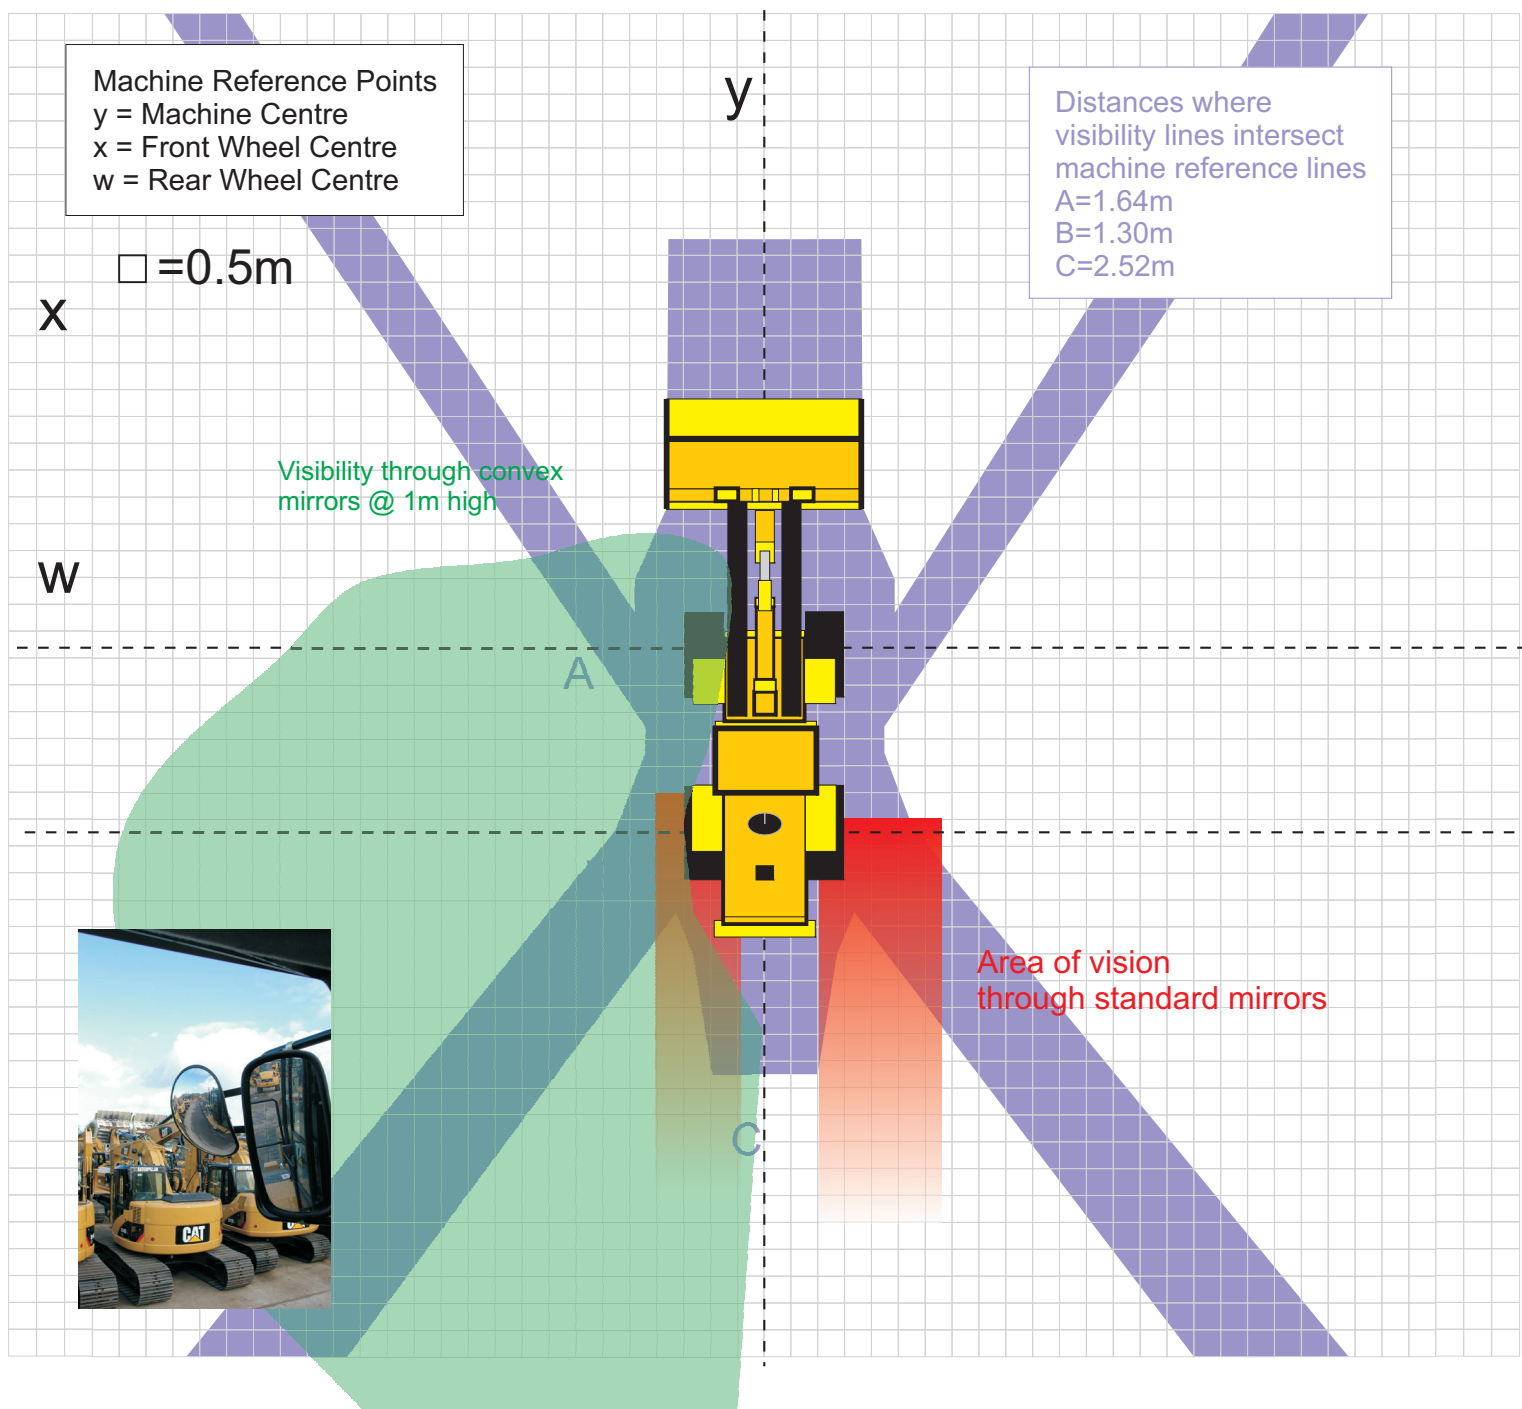



Machine Visibility

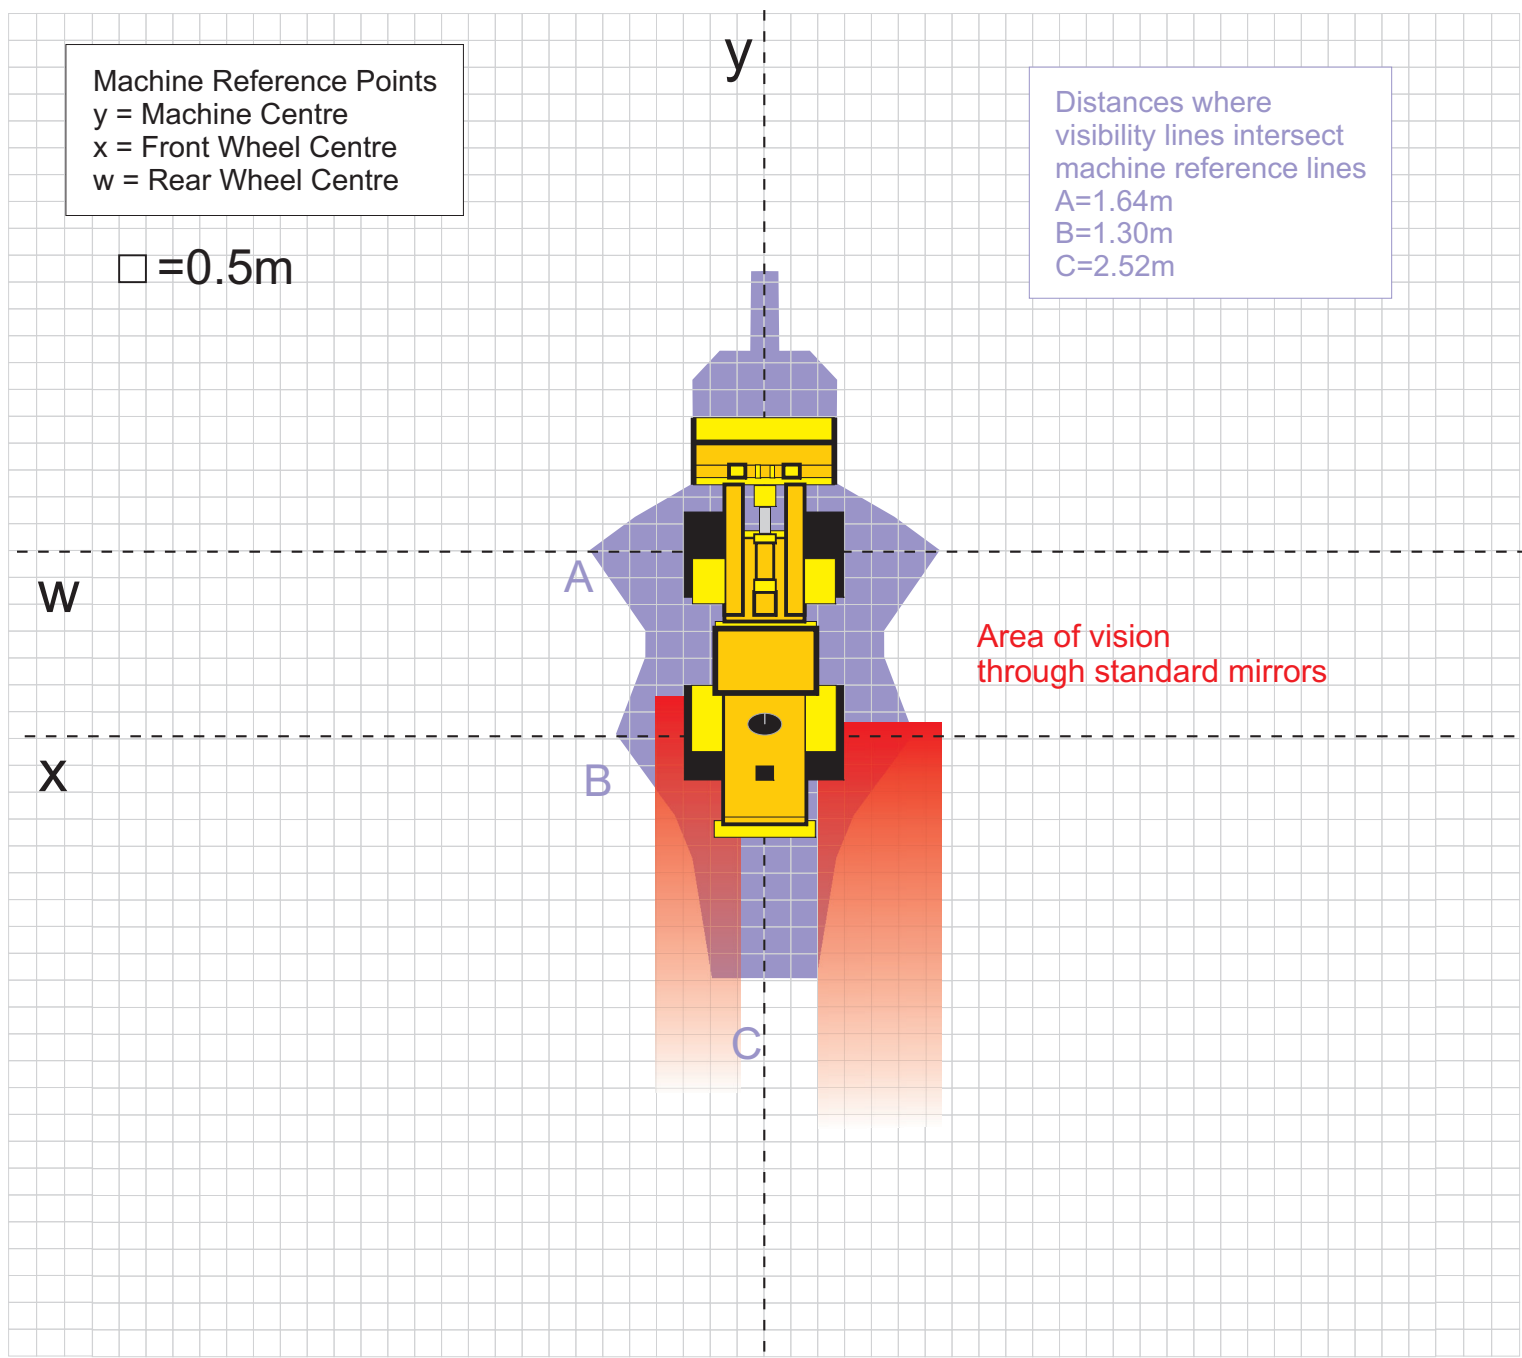

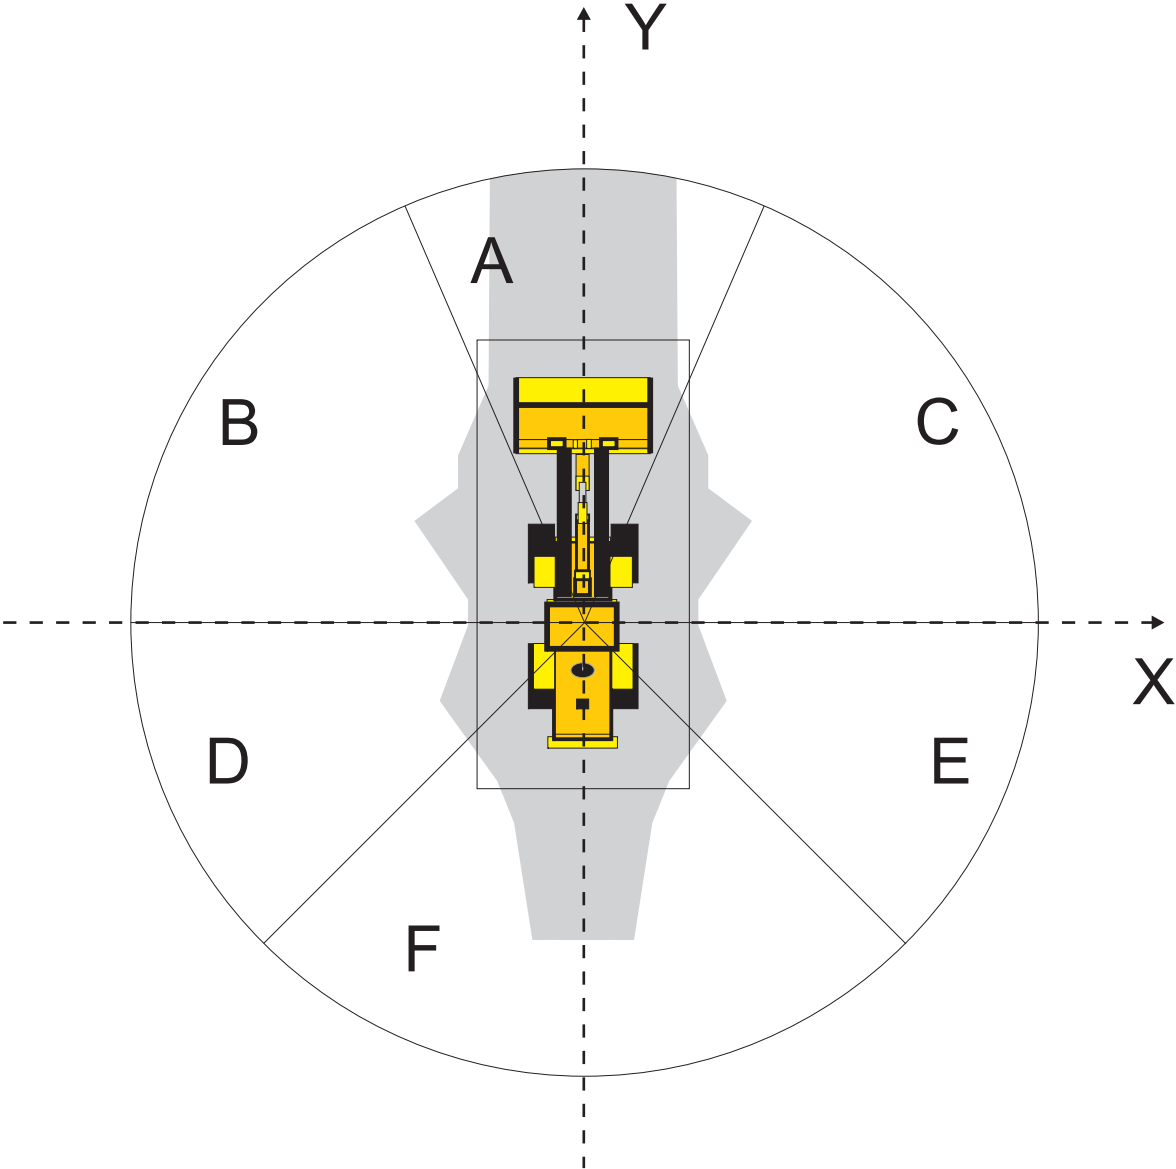

This is a rough interpretation of ISO5006 derived from a standard visibility assessment carried out by Spillard Safety Systems and should only be used as a guide and not fact.

