




CAT D6T

# Machine Visibility



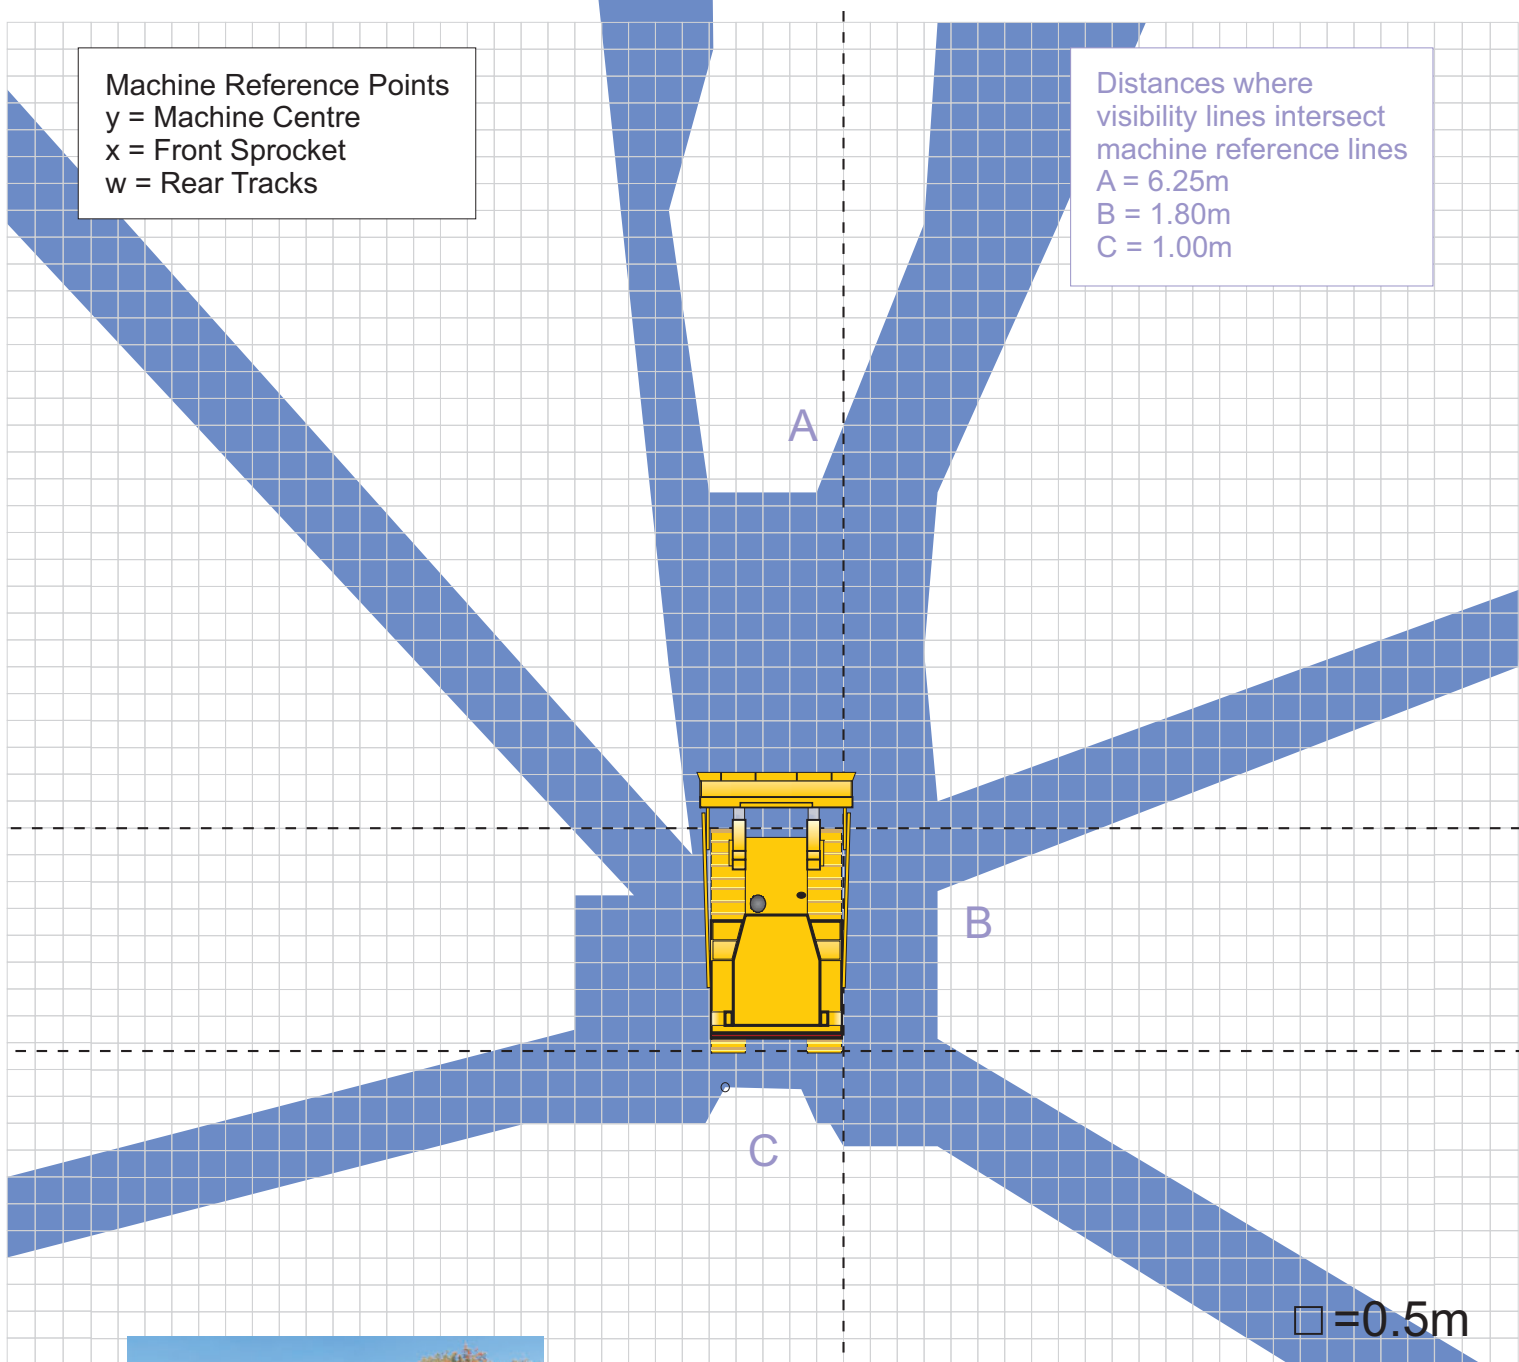


CAT D6T

# Enhanced Visibility

Machine Reference Points  
y = Machine Centre  
x = Front Sprocket  
w = Rear Tracks

Distances where  
visibility lines intersect  
machine reference lines  
A = 6.25m  
B = 1.80m  
C = 1.00m

Visibility through  
Convex Mirrors  
at 1 metre high

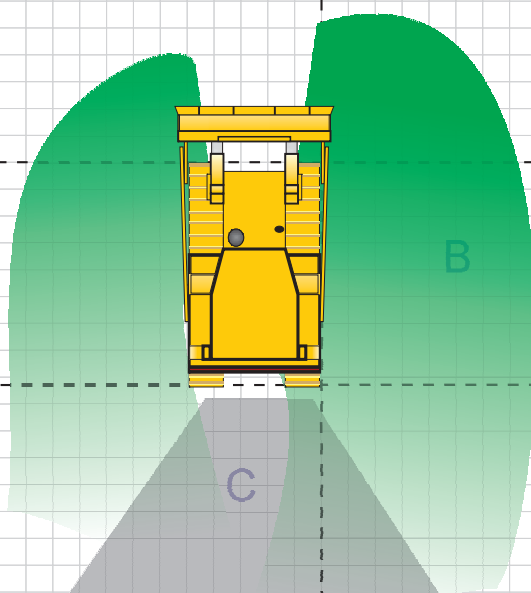

□ = 0.5m




Visibility through  
camera system  
at 1 metre high



CAT D6T

# Comparison

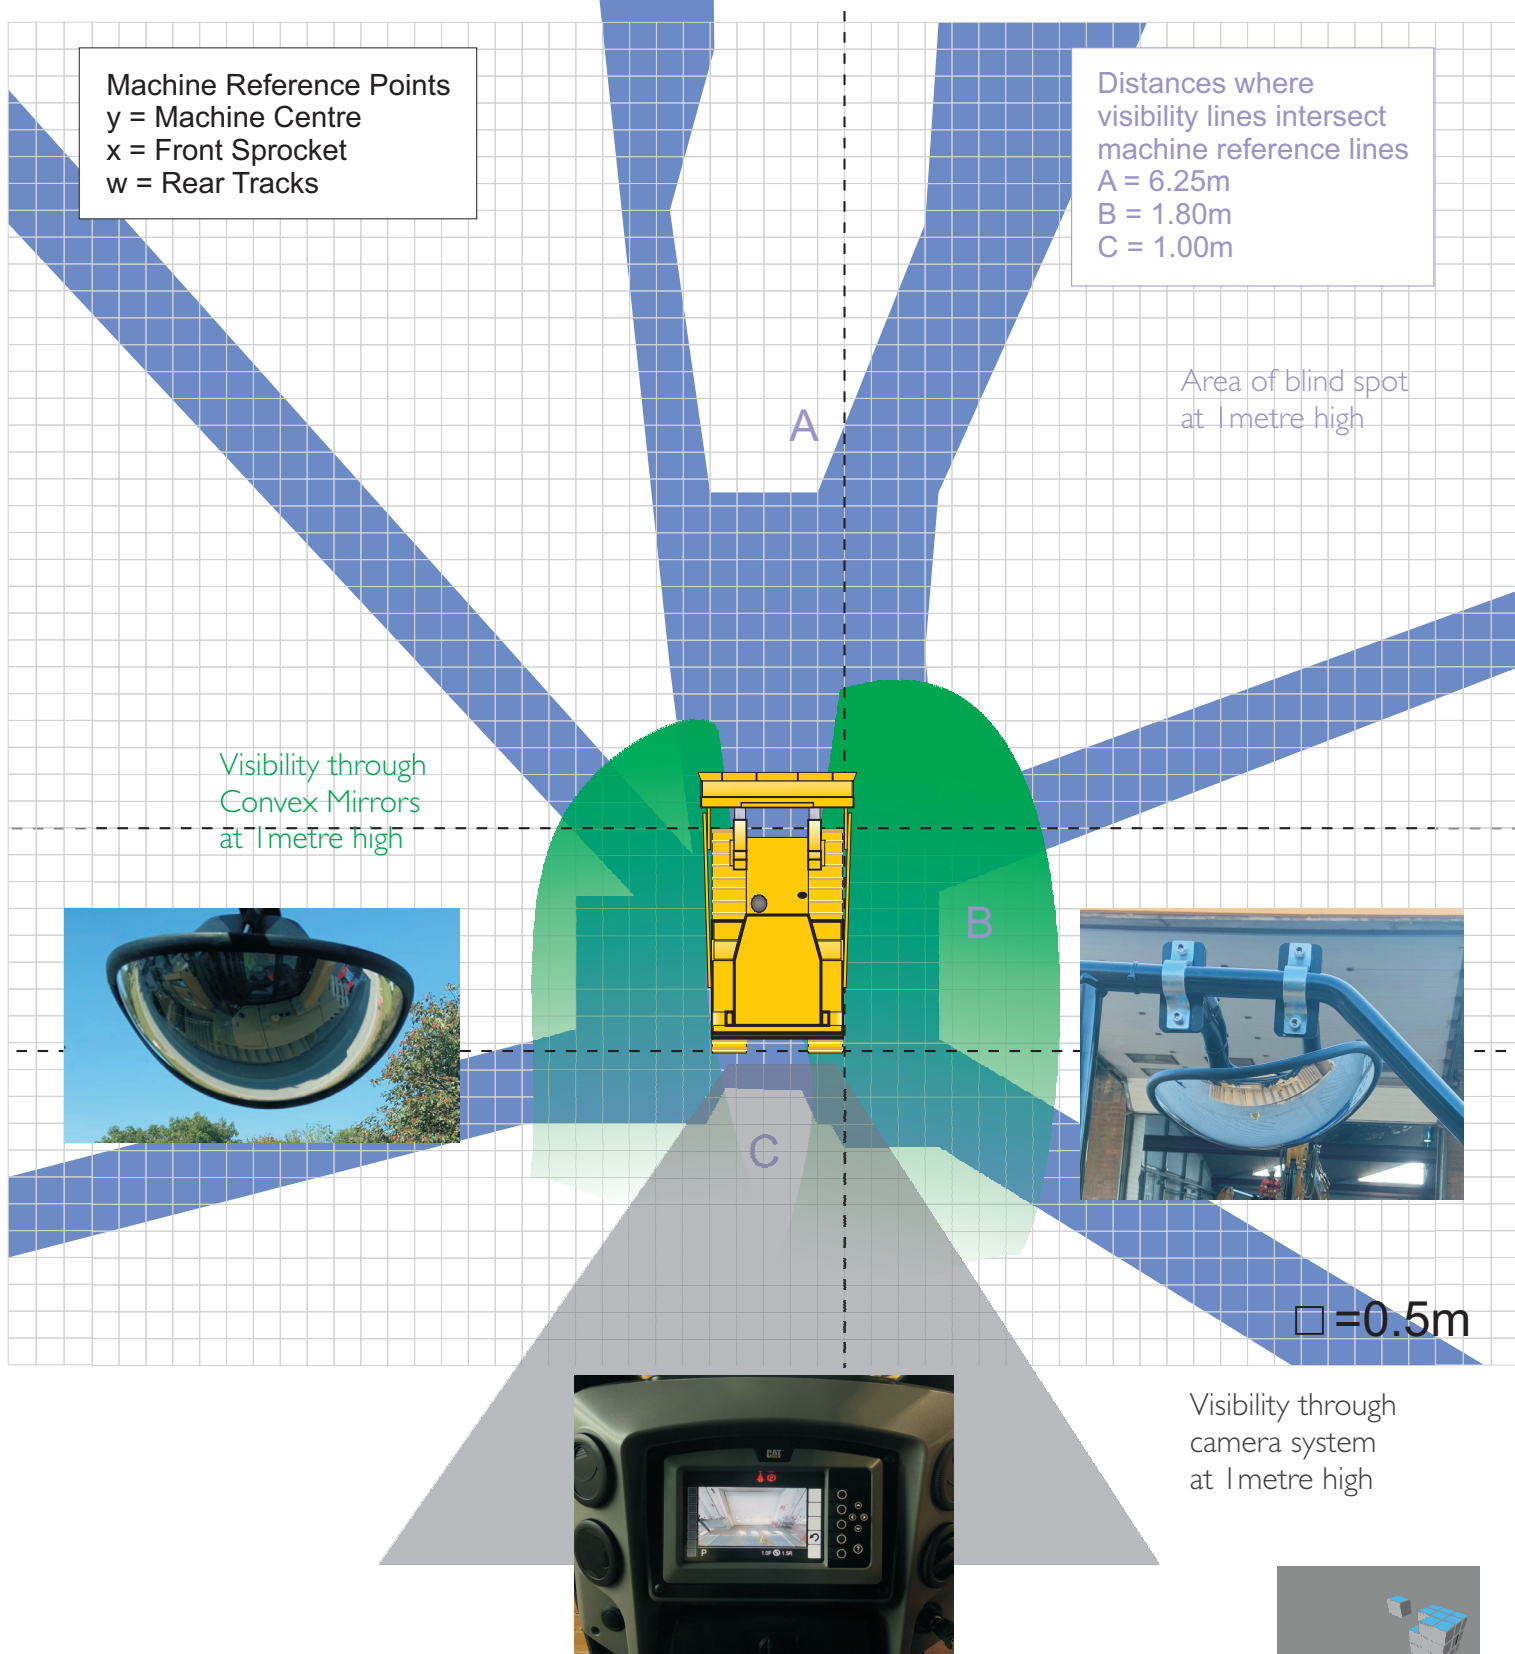



CAT D6T

## Restricted Visibility Issues to consider



Decal location