



JLG3513


# Machine Visibility

carriage 500mm

21m  
10m

Machine Reference Points  
y = Machine Centre  
x = Front Wheels  
w = Rear Wheels

Distances where  
blind spot areas intersect  
machine reference lines  
A=1.7m  
B=2.45m


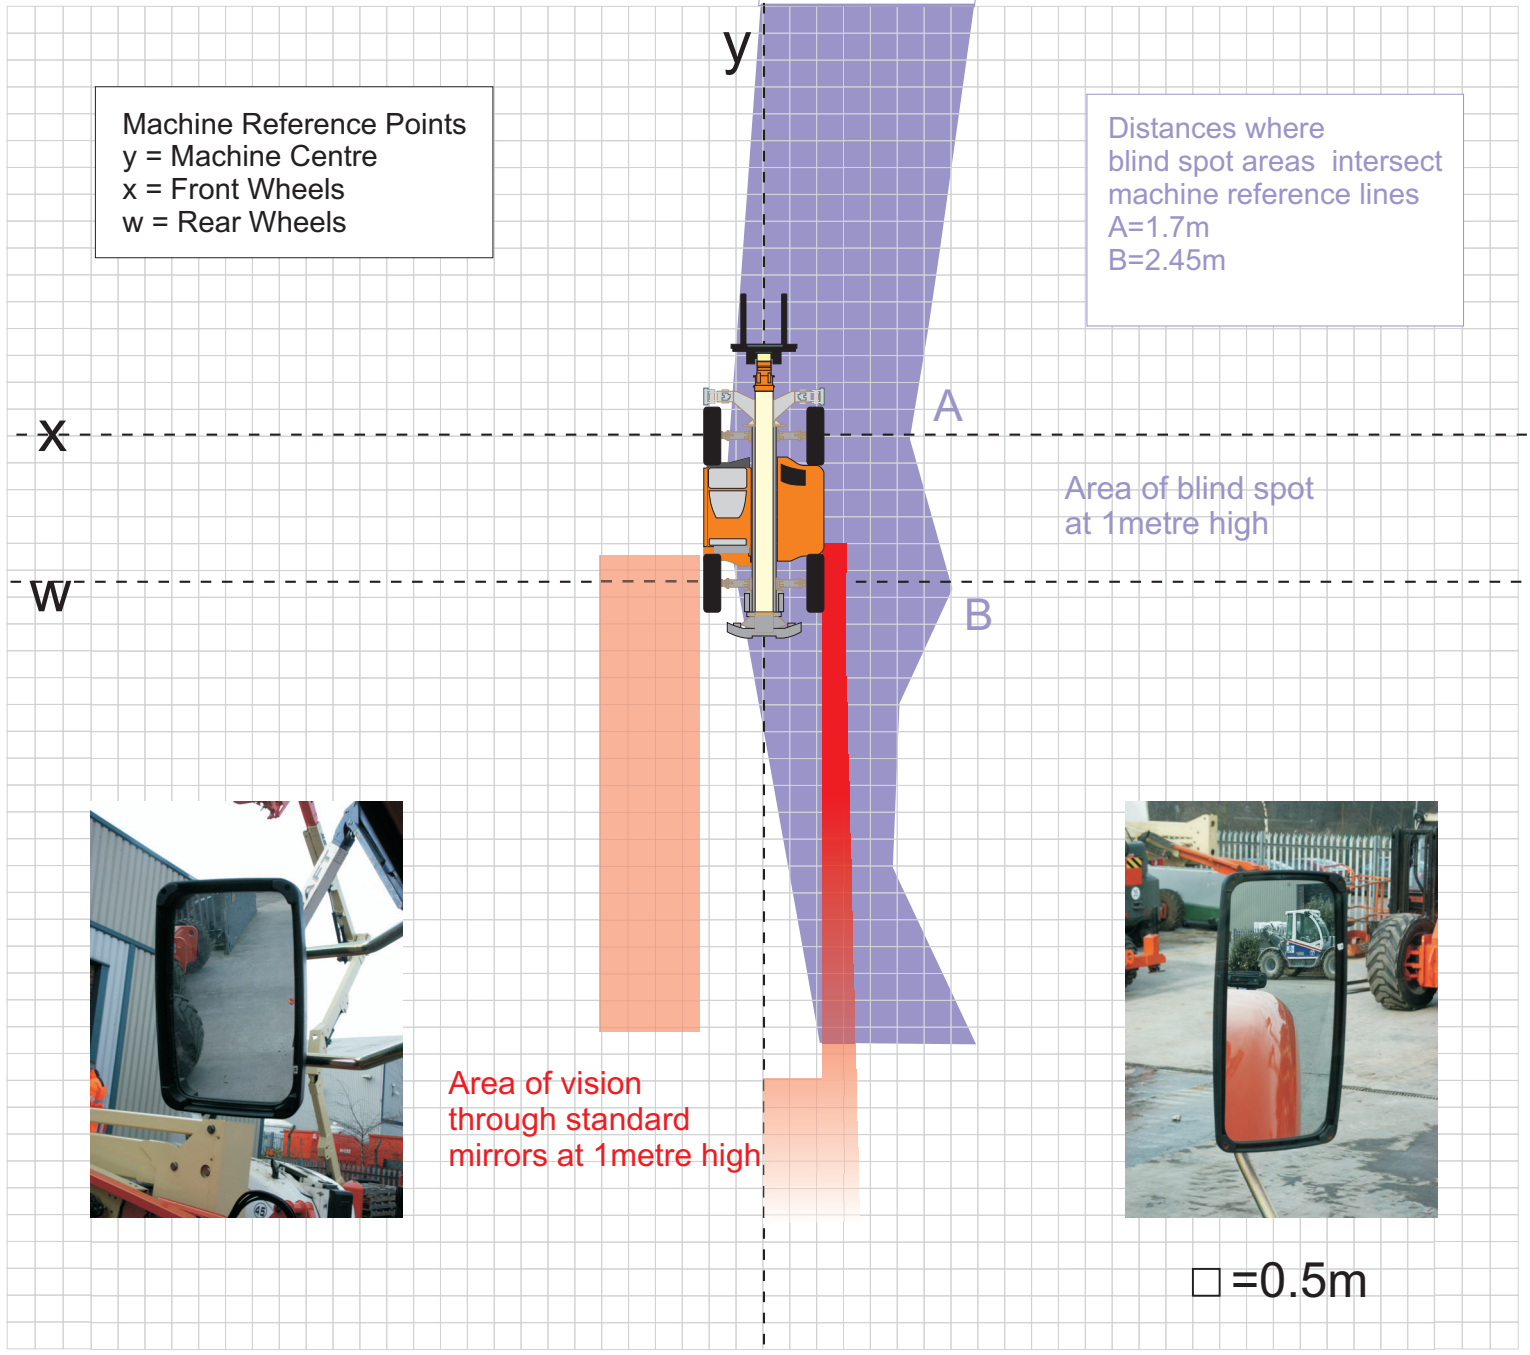




JLG3513

# Enhanced Vision

carriage 500mm

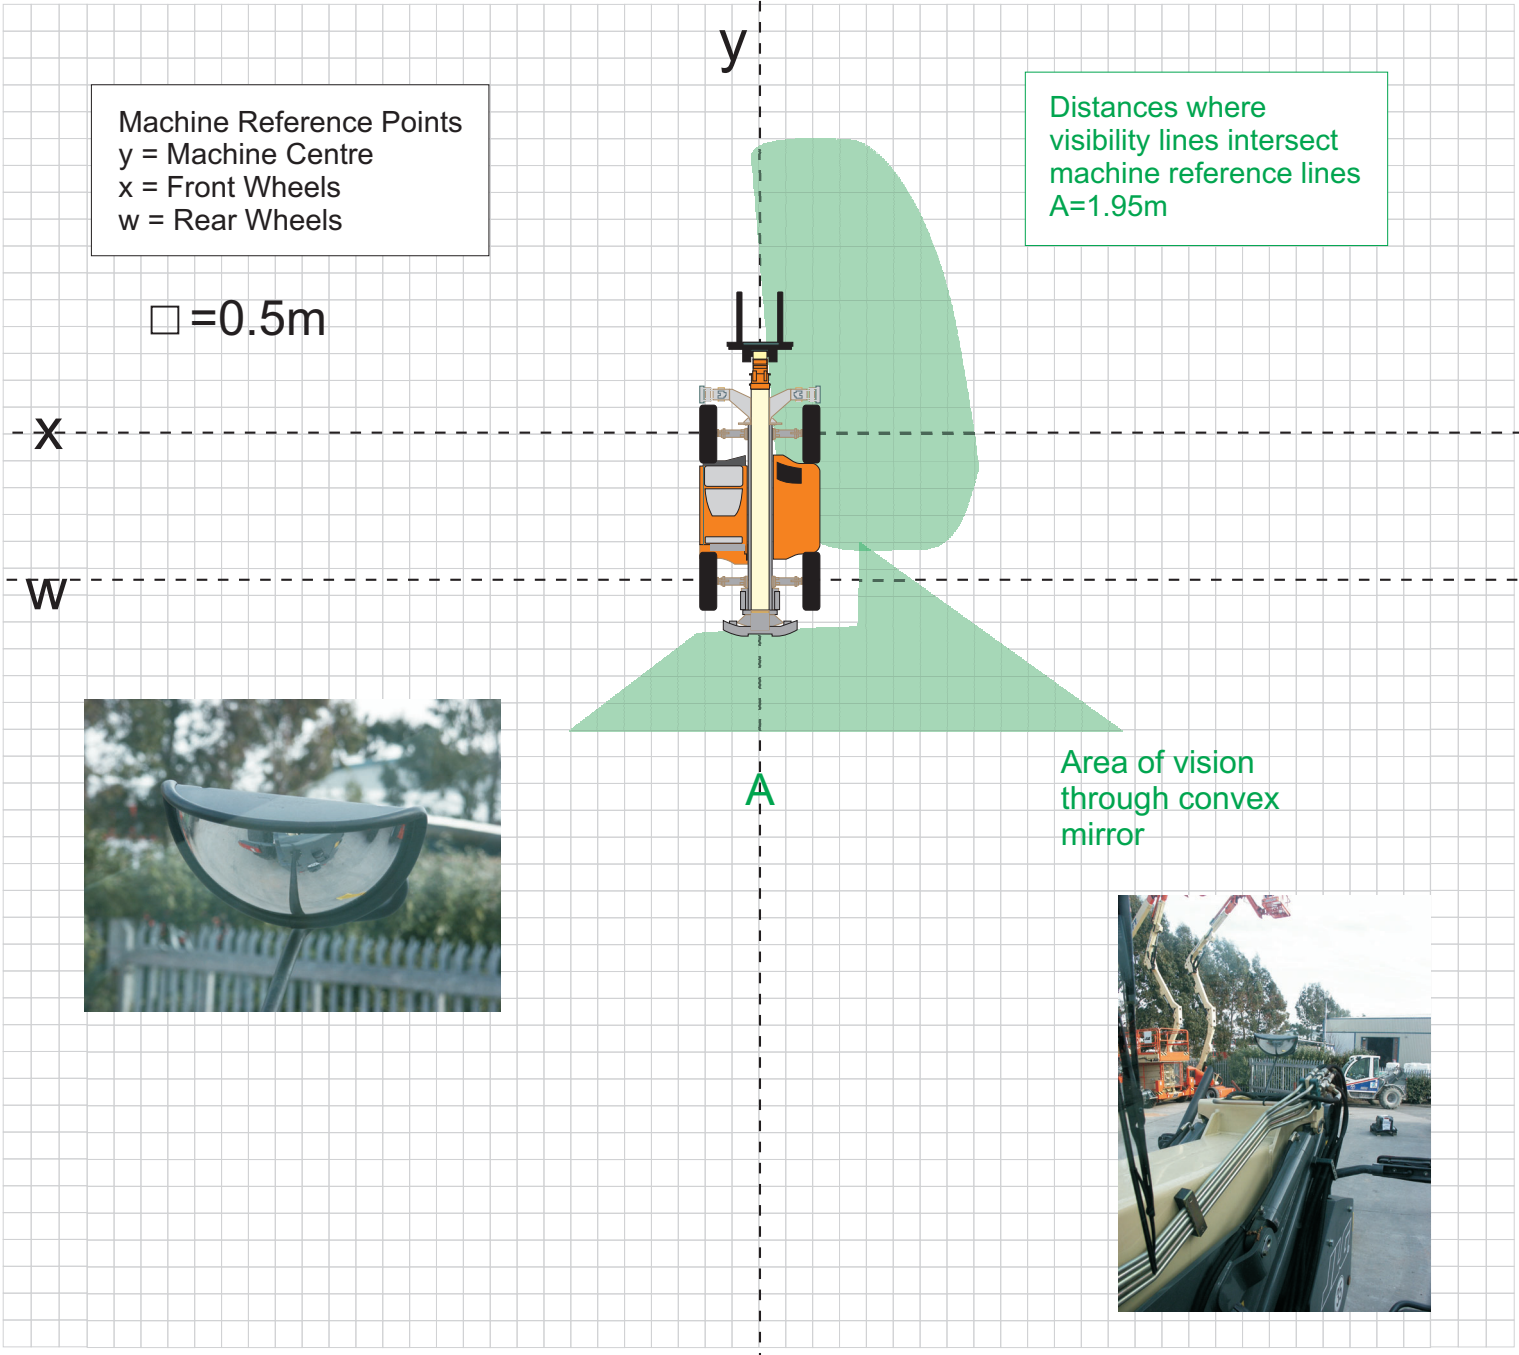




JLG3513

# Comparison

carriage 500mm

21m  
10m

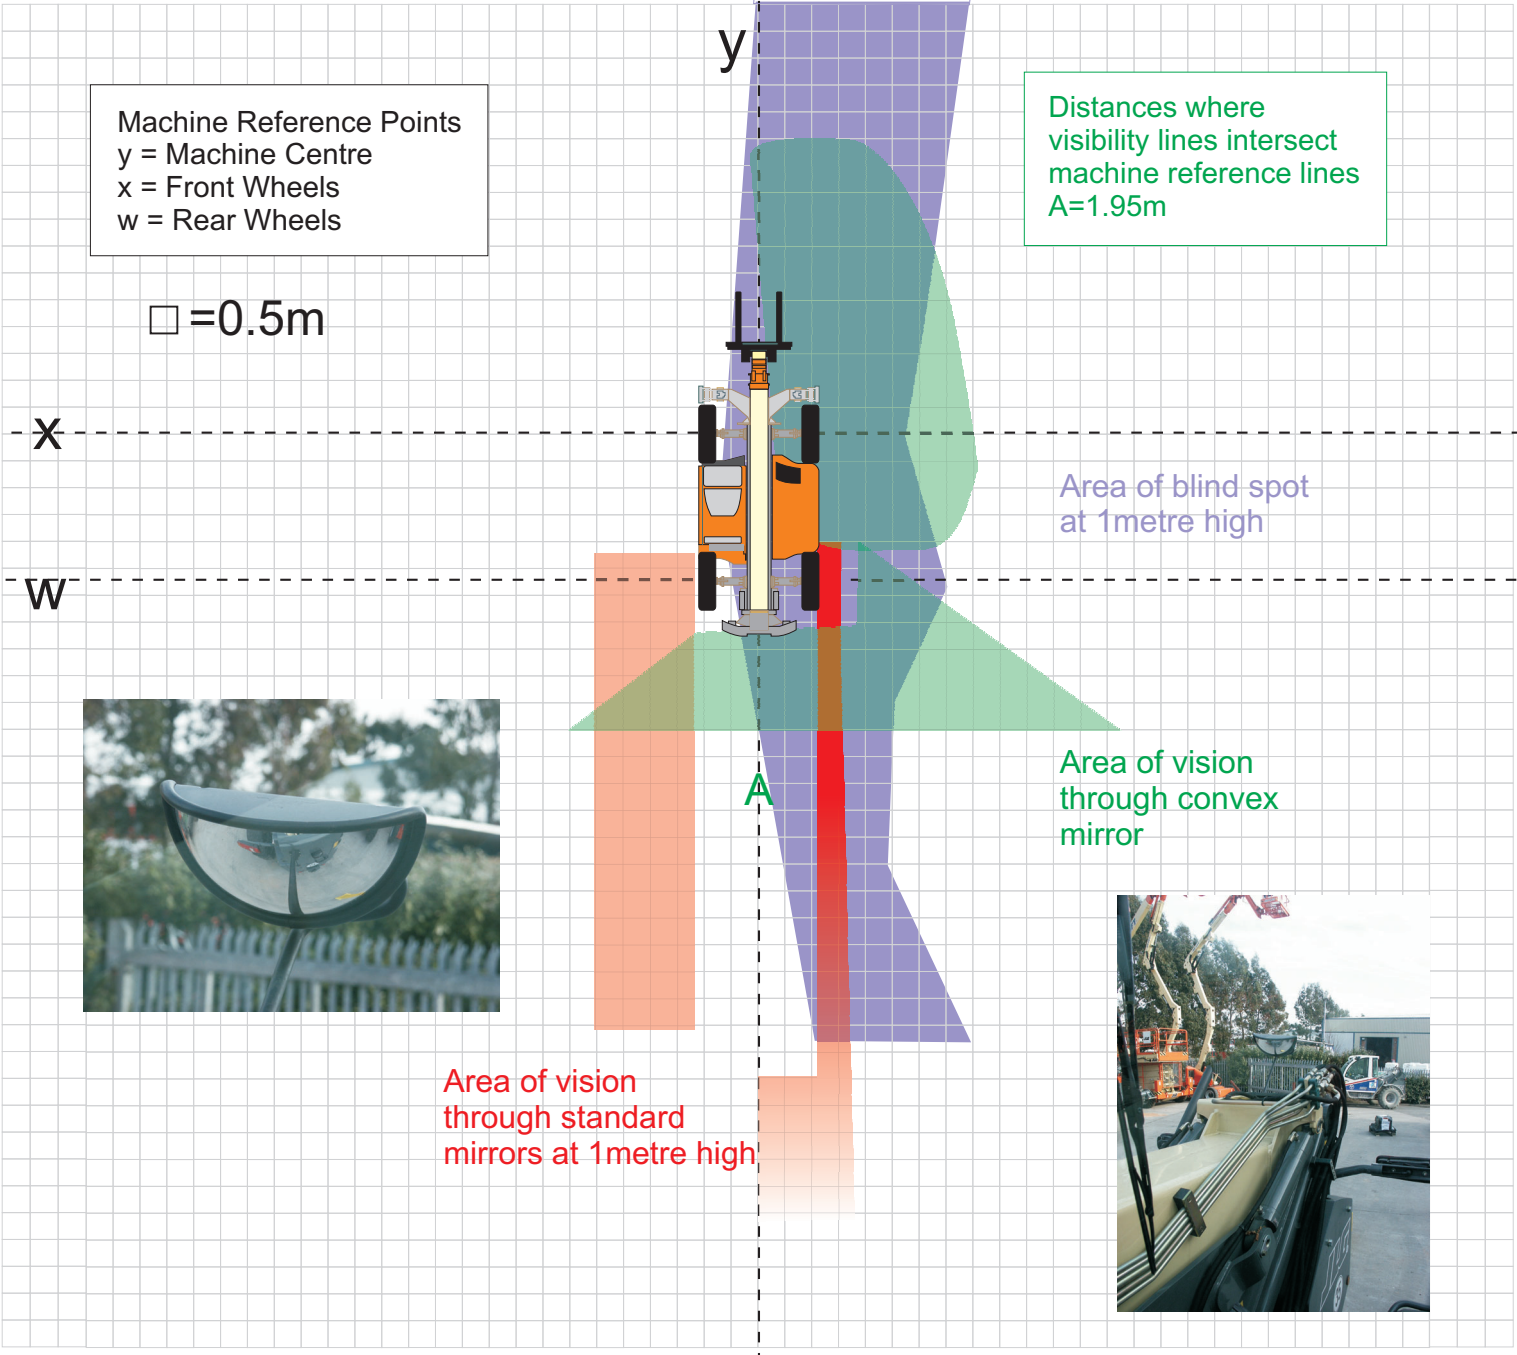





## Telehandler Convex Mirrors Photos





allroundvision

## Convex Mirrors Telehandler Fitting Details

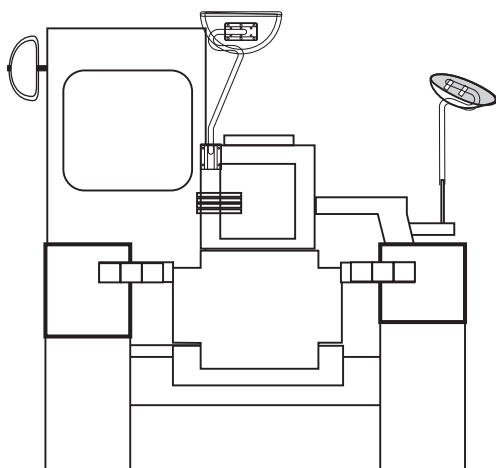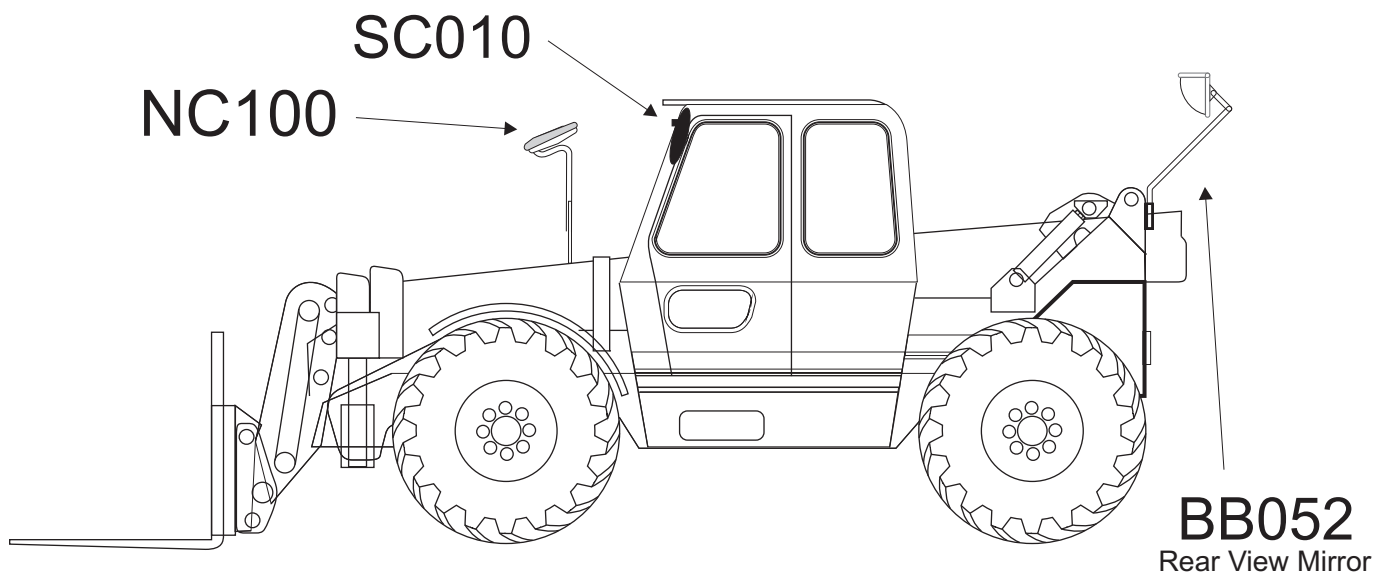

### Note.

Hole layout to be drilled and tapped for BB052 on rear plate or mounting plate to be welded in position. SC010 mounts to existing mirror bracket. NC100 bracket bolts onto existing mirror arm. NC100 attaches to arm using  $\frac{3}{4}$  clips.