Machine Visibility

□ =0.5m

Machine Reference Points
y = Machine Centre
x = 1st Rear Wheel Centre
w = 2nd Rear Wheel Centre

Distances where
blind spots intersect
machine reference lines
A=4.2m
B=2.0m

Area of vision
through standard mirrors

Area of blind spot
at 1metre high

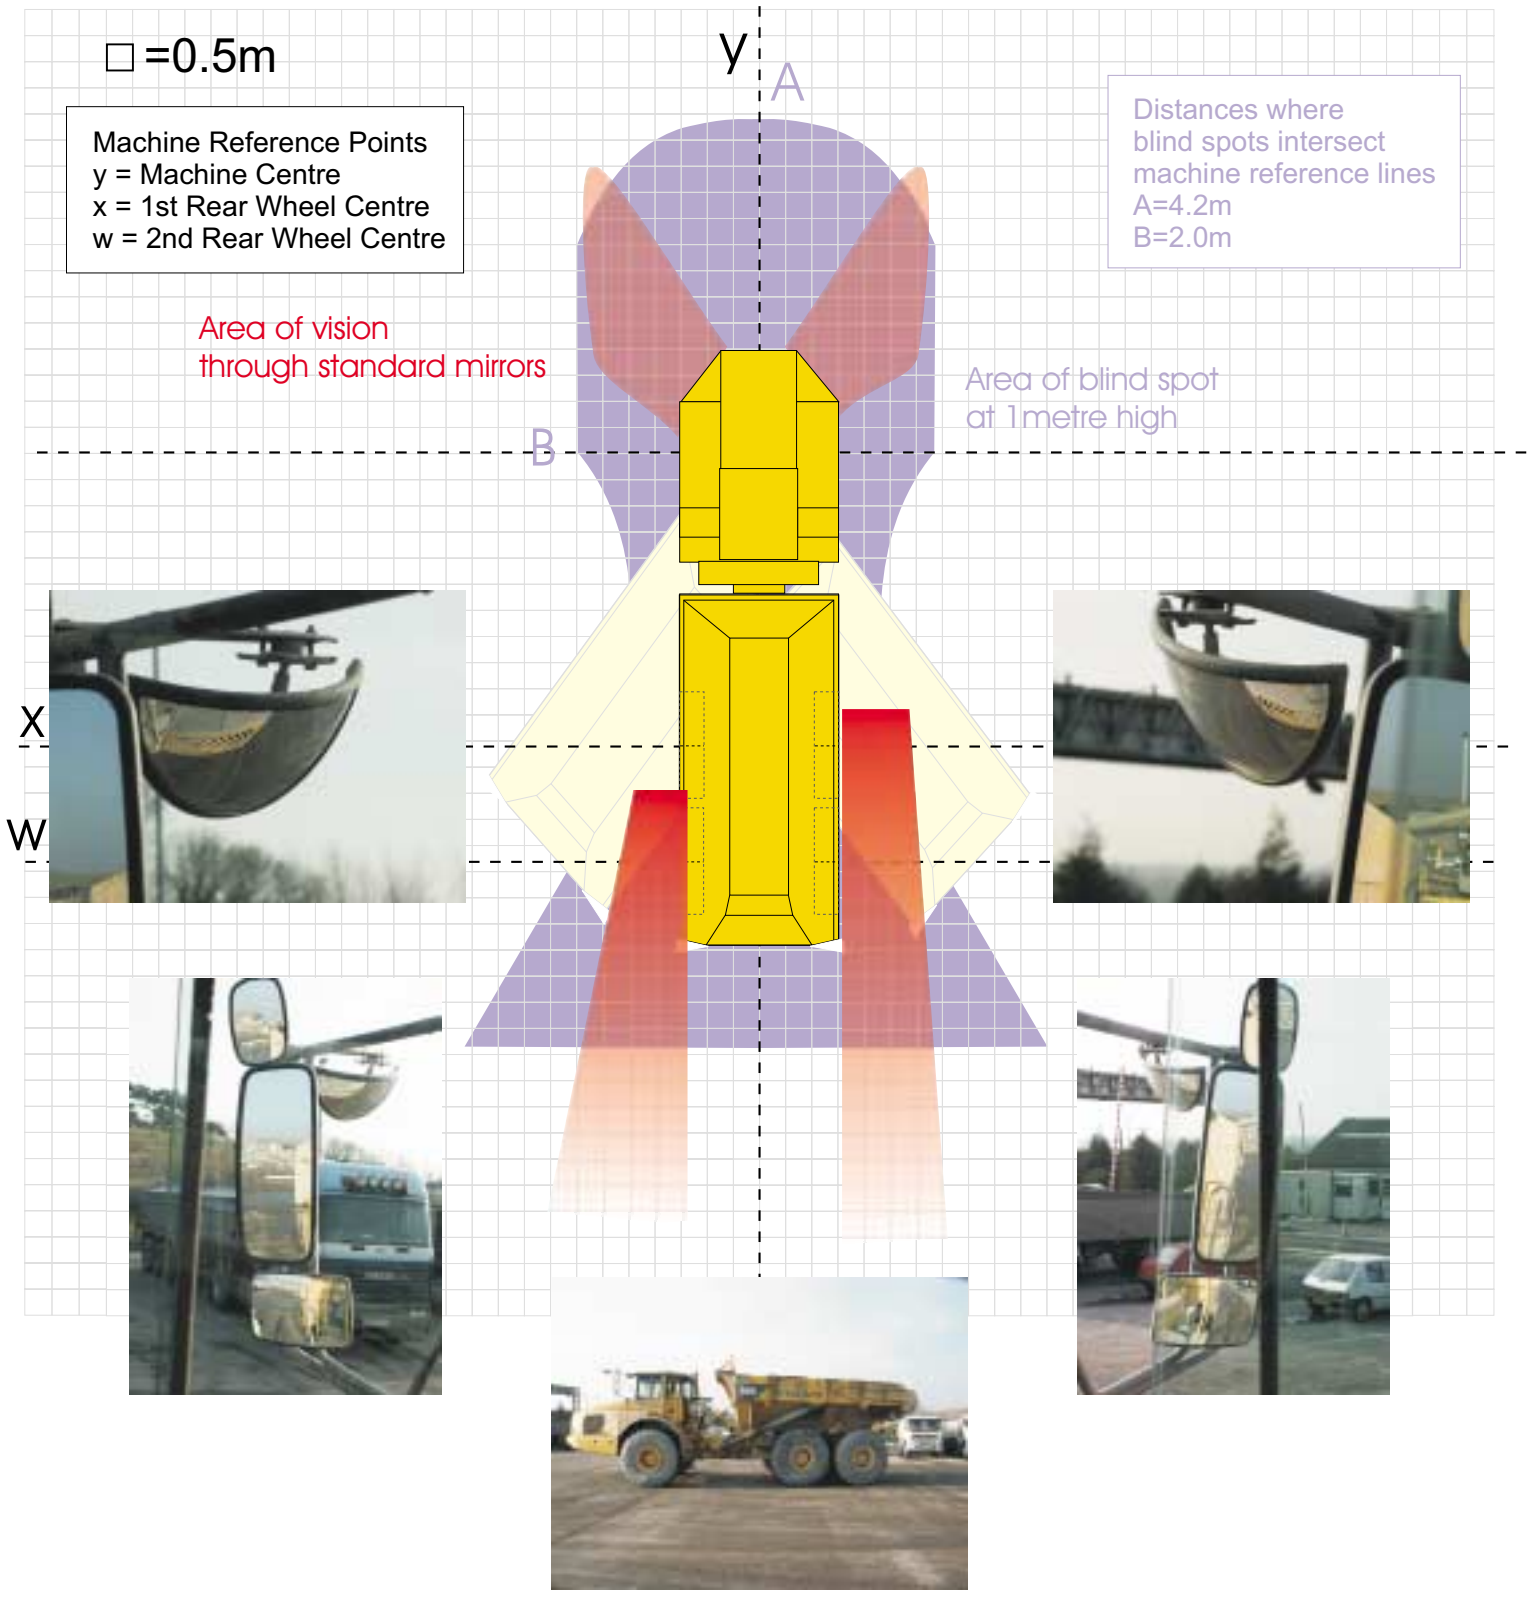

SSS
SPILLARD SAFETY SYSTEMS

©1998-2003 Spillard Safety Systems Limited. All Rights Reserved

Enhanced Visibility

□ =0.5m

Machine Reference Points
y = Machine Centre
x = 1st Rear Wheel Centre
w = 2nd Rear Wheel Centre

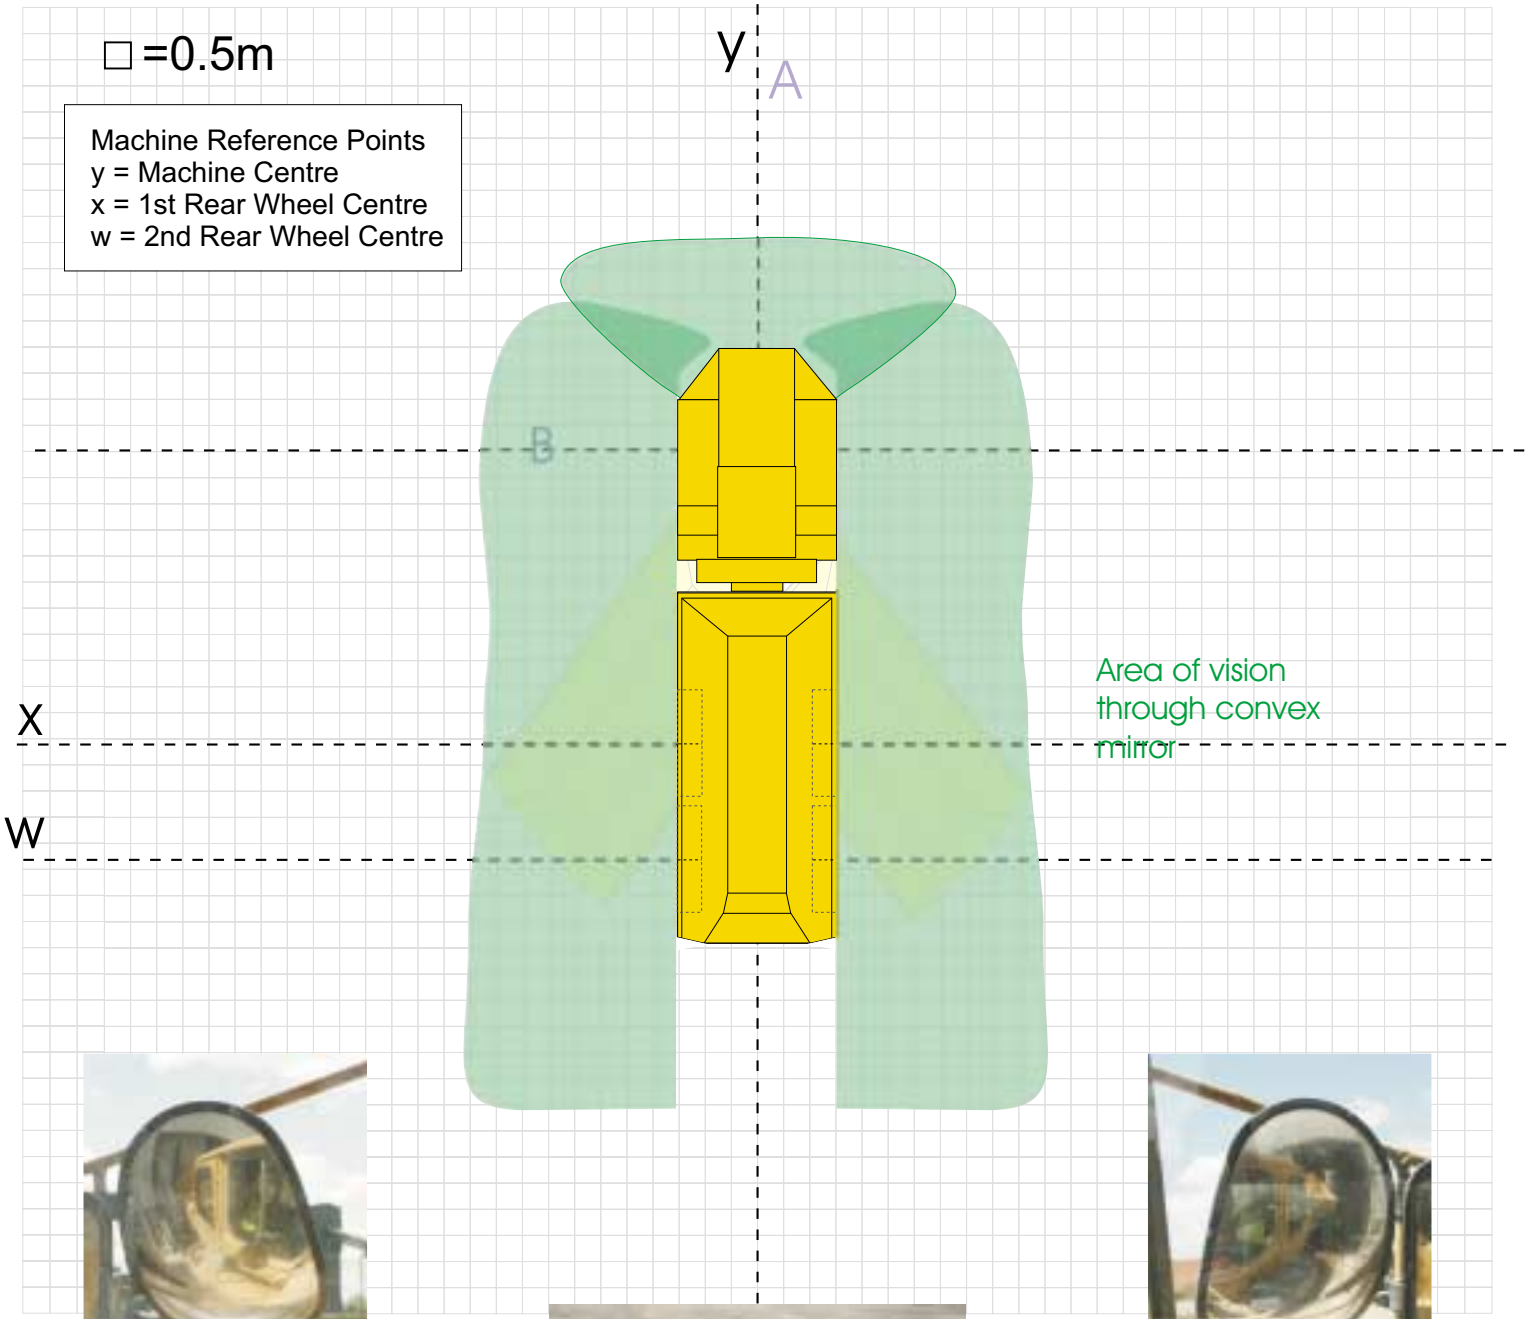

Options

1 x Bb052 forward mount
2 x Nc100 wing mirrors

SSS
SPILLARD SAFETY SYSTEMS

©1998-2003 Spillard Safety Systems Limited. All Rights Reserved

Volvo A40D

Comparison

□ =0.5m

Machine Reference Points
y = Machine Centre
x = 1st Rear Wheel Centre
w = 2nd Rear Wheel Centre

Distances where
blind spots intersect
machine reference lines
A=4.2m
B=2.0m

Area of vision
through standard mirrors

Area of blind spot
at 1metre high

y

A

B

X

W

SSS
SPILLARD SAFETY SYSTEMS

©1998-2003 Spillard Safety Systems Limited. All Rights Reserved